中联重制 ZVII1213G Mobile Impact Crusher

最大喂料尺寸: 600 mm

进口尺寸: 900x1320 mm

装机功率: 305 kW



ZOOMLION

颜色组合已取得注册商标保护

ZMI1213G 履带移动反击式破碎站

Modularized assembly technology facilitates transport and maintenance.

The max capacity of ZMI1213G mobile impactor crusher is 350t/h, and the max feeding grain size is 600mm.


The smart control systems of ZMI1213G mobile impactor crusher have the function of remote real-time diagnostics & easy process optimization.


The various options that include an additional screen module with a return conveyor, magnetic separator and air blower greatly expand the application.

The ZMI1213G mobile impactor crusher is equipped with a load-sensitive hydraulic control system, which has the advantages of low caloric value, less power loss, accurate and safe control.

The core components are provided by industry-leading manufacturers which guarantees the reliability of ZMI1213G mobile impactor crusher.

整车尺寸参数



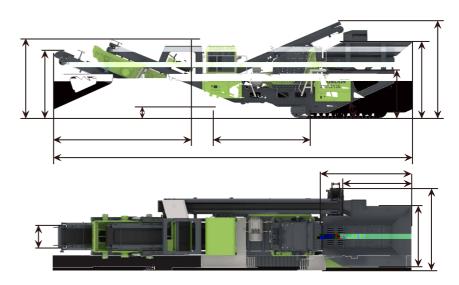

慗车性能会数

主要参数 Main Parameters	单位 Unit	数值 Value
Capacity	t/h	180-350
Inlet Size	mm	900x1320
Main Conveyor Width x Length	mm	B1000x13000
Discharge Height	mm	3200
Crushing Device Power	kW	250
Engine Power	kW	103
Driving Power	kW	305
Transport Size Width x Length x Height	m	18x3.55x3.75
Total Weight	t	51
Power Type	\	

注: 外接市电 (三相电 380-450V, 50Hz) 或外接发电机组 (与 ZMS2065G 成套)

